

Philips Power Supply | Custom Optics | Luxeon T/TX LED's & Osram Oslon Series LED's

Applications

- ◊ Stadiums
- ◊ Sporting venues
- ◊ Signage Lighting
- ◊ Security Lighting
- ◊ Car Parks
- ◊ Service yards

Specification

- ◊ Efficacy (lm/W): 115
- ◊ Voltage (V AC): 95 - 305
- ◊ Frequency (Hz): 50/60
- ◊ Power Factor >95
- ◊ IP: 65
- ◊ Beam Angle(°) : 85x135
- ◊ Colour Temperature : 6000k
- ◊ Colour Rendering (Ra) >70
- ◊ Average Life (hrs) : 50000 (L70)
- ◊ Operating Temperature: (°) -40 to + 45

Options

- ◊ Beam Angles(°) : 15, 30, 40, 60
- ◊ Round, Aspherical lenses
- ◊ CCT Options Available (please call)
- ◊ 800w to 1000w available (please call)



Ordering information

Variant Code	Power (w)	Lumens	mm			Weight (Kg)
			Length	Width	Depth	
ATL-60-6-100	60	6000	327	366	91	4.5
ATL-80-6-100	80	8000	387	366	91	5.5
ATL-100-6-100	100	10000	387	366	91	5.5
ATL-150-6-100	150	15000	507	366	91	7.5
ATL-200-6-100	200	20000	507	366	91	7.5
ATL-250-6-100	250	25000	507	366	91	8.5
ATL-300-6-100	300	30000	606	511	117	14.5
ATL-350-6-100	350	30000	606	511	117	15
ATL-400-6-100	400	40000	606	511	117	15.5
ATL-500-6-100	500	50000	600	811	369	22
ATL-600-6-100	600	60000	600	811	369	25




LED vs Metal Halide Replacement Table

LED Flood Light	Metal Halide Flood Light
60W / 80W	150W
100W / 150W	250W
200W / 250W	400W
300W / 350W	750W
400W / 500W	1000W
600W	1500W

60% Energy Saving !

LED >>> Metal Halide

Installation Configuration Schematics

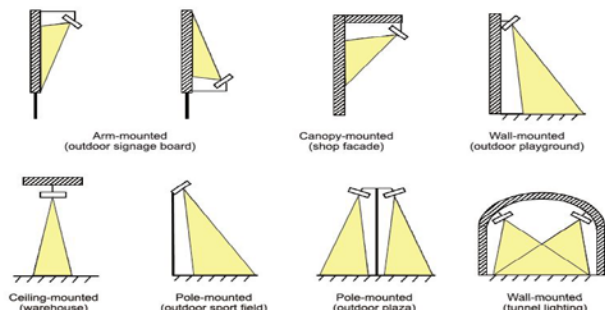

5 years

