

DOK-GUARDIAN™

SAFETY BARRIERS



DOK-GUARDIAN Heavy-Duty Safety Barrier.

PROTECT YOUR PERSONNEL AND EQUIPMENT



Vacant loading docks create a dangerous 1200 mm drop-off for dock personnel and material handling equipment. The brutal reality of this dangerous drop-off is often recognized only after it is too late. Rite-Hite has a full line of barrier products to make your loading docks safer. Dok-Guardian Safety Barriers help meet your requirements regarding protection for wall openings.

RITE-HITE®


Prevent drop-off accidents on your loading docks



DOK-GUARDIAN Heavy-Duty Safety Barrier.

DOK-GUARDIAN Heavy-Duty Safety Barrier

- ▶ Helps prevent fork-lift trucks, pallet jacks and pedestrians from falling off the loading dock
- ▶ Manually positioned barrier easily fits across openings up to 4880 mm wide
- ▶ Barrier heightens dock drop-off awareness
- ▶ Warden™ guards provide excellent door track protection

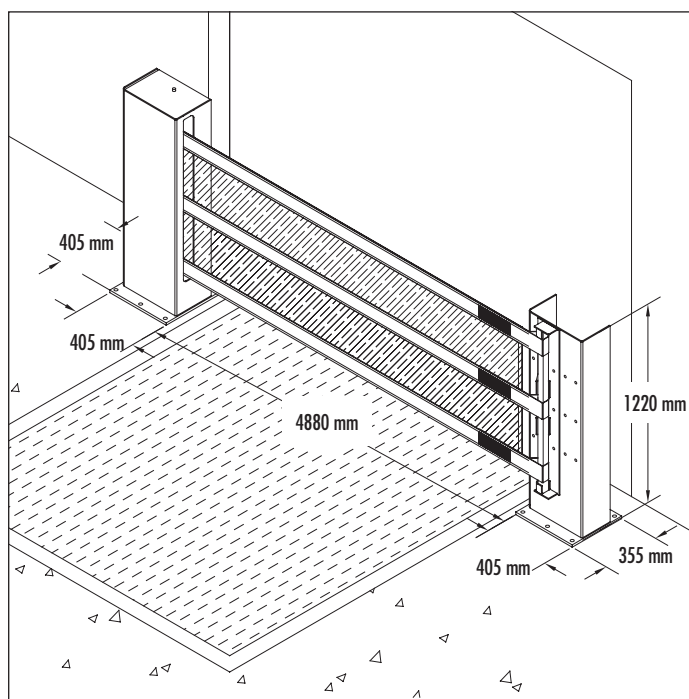

Specifications

- ▶ 1220 mm tall, 6.4 mm steel Warden door guards (roller side and latching side)
- ▶ Warden guards to be painted safety yellow
- ▶ Utilizes (6) 19 mm x 135 mm anchors each side (included)
- ▶ 16 mm x 405 mm x 405 mm base plate (roller side)
- ▶ 16 mm x 405 mm x 355 mm base plate (latching side)
- ▶ Curtain to be red PVC-coated fiberglass mesh with three heavy-duty polyester safety restraint straps
- ▶ Proper setback from the edge of the loading dock will be determined by the width of the Dok-Guardian
- ▶ 1-year warranty



Barrier will stop a 4500 kg (45 kN) fork-lift truck traveling up to 6.5 kilometer per hour with little or no damage to the safety barrier.



Unique Warden "pocket" design.

DOK-GUARDIAN™

SAFETY BARRIERS




DOK-GUARDIAN Light-Duty Safety Barrier.

DOK-GUARDIAN Light-Duty Safety Barrier

- ▶ Helps prevent carts, pedestrians and non-motorized fork-lift trucks from falling off the loading dock
- ▶ Barrier will stop a 450 kg (4.5 kN) load travelling up to 6.5 kilometers per hour with little or no damage to the safety barrier
- ▶ Manually positioned barrier easily fits across openings up to 4880 mm wide
- ▶ Warden™ guards provide door track protection

Specifications

- ▶ 1220 mm tall, 4.8 mm steel Warden door guards (roller side and latching side)
- ▶ Warden guards to be painted safety yellow
- ▶ Utilizes (4) 13 mm x 135 mm anchors each side (included)
- ▶ 6.4 mm x 405 mm x 280 mm base plates (roller side and latching side)
- ▶ Curtain to be yellow PVC-coated fiberglass mesh with three polyester safety restraint straps
- ▶ Proper setback from the edge of the loading dock will be determined by the width of the Dok-Guardian
- ▶ 1-year warranty

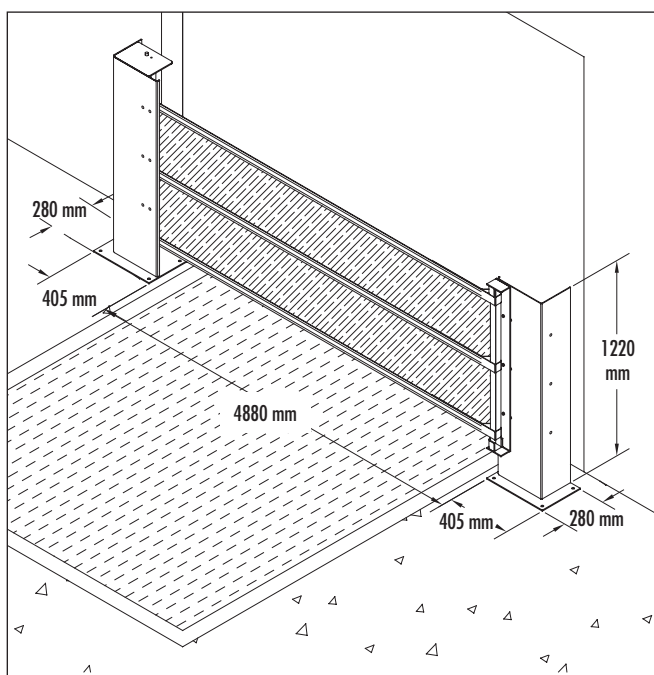

Fast, easy activation



1. To activate, extend barrier across the opening.



2. Latching system ensures safe, strong barrier protection.



3. To store, remove barrier from the latching bracket and walk barrier to non-active position. Barrier automatically retracts.


DOK-GUARDIAN™

SAFETY BARRIERS

Door DOK-GUARDIAN Safety Barrier

Able to withstand only 135 kg (1.35 kN) to 360 kg (3.6 kN) of force, conventional sectional doors are no match for material handling equipment. The unique Door Dok-Guardian makes loading docks safer by preventing fork-lift trucks from going through closed sectional doors. The Door Dok-Guardian system also reduces sectional door maintenance costs by eliminating most track and bottom panel damage.

- ▶ Loading dock drop-off protection for "closed door policy" facilities
- ▶ Door Dok-Guardian will stop a 4500 kg (45 kN) fork-lift truck traveling up to 6.5 kilometers per hour with little or no damage
- ▶ Break-away door brackets allow for easy reattachment after significant impact
- ▶ Heavy-duty nylon strap mounted to bottom door panel automatically positions barrier with the travel of the sectional door
- ▶ Steel impact brackets attached to ends of strap slide into Warden™ door guards when the sectional door is closed
- ▶ Door track protection and impactable bottom panel for lower maintenance costs
- ▶ The heavy-duty Warden door guards are 790 mm high and constructed of 6.4 mm steel to provide track protection when door is raised for loading/unloading
- ▶ 1-year warranty

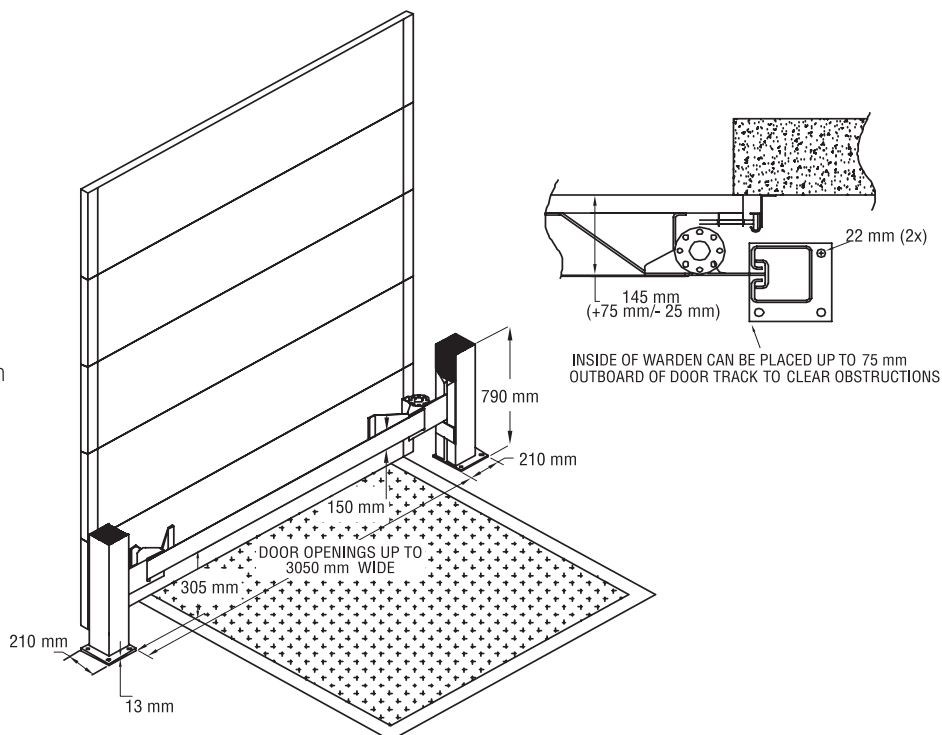

CAEMA®
RITE-HITE®

CAEMA Verladessysteme GmbH
Carl-Zeiss-Strasse 3
34471 Volkmarsen
Germany
Tel. +49 (0) 5693 9870-0
Fax +49 (0) 5693 987020

www.caema-ritehite.com

C14DGB807A

RITE-HITE®

Rite-Hite Corporation
8900 North Arbon Drive
Milwaukee, WI 53223
USA
Tel. +1 (414) 355 2600
Fax +1 (414) 355 9248

www.ritehite.com

CALJAN
RITE-HITE

Caljan Rite-Hite ApS
Ved Milepælen 6-8
8361 Hasselager
Denmark
Tel. +45 8738 7800
Fax +45 8738 7801

www.caljanritehite.com

RITE-HITE®, Safe-T-Gate® and GuardRite® are trademarks of the RITE-HITE Corporation.

RITE-HITE products are covered by one or more U.S. Patents with other U.S. and foreign patents pending. RITE-HITE reserves the right to make product improvements without prior notice.